
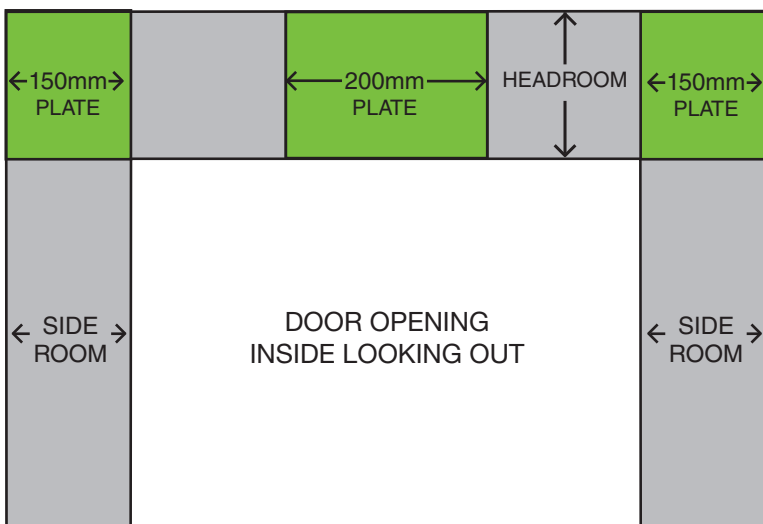


## CEILING NOGGIN REQUIREMENTS

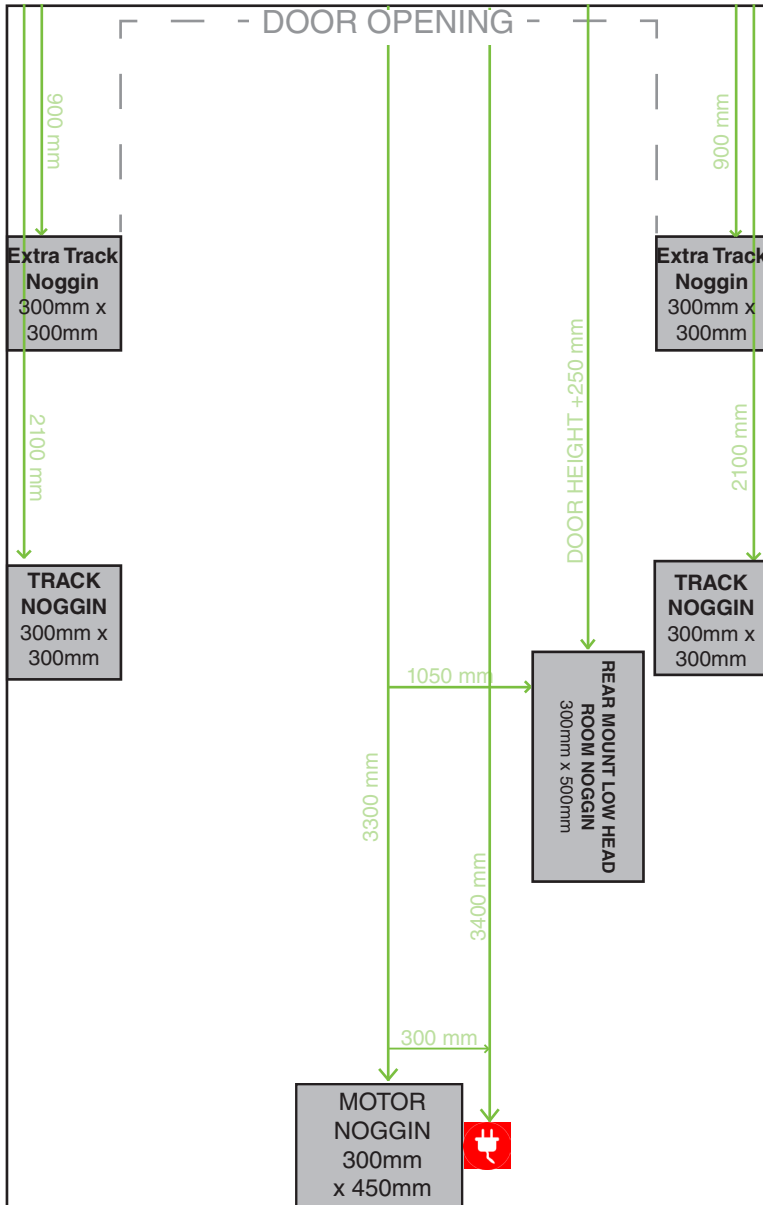

\*Noggins must be flush with plaster (no cavity).

\*Extra Track Noggin only required for opening over 2305mm height or 5200mm width.

\*Consider the motor position before installing lights in garage. 300mm off centre would be adequate or 3700mm back from opening for light to be positioned behind motor.

\*Rear Mount Low Kit Noggin is required for head-room between 250mm to 150mm

\*Power-point to be 3400 mm back from opening & 300mm off centre.

\*Standard Headroom 350mm minimum.

\*A Low Head Room Kit is required for head-room between 350mm to 250mm.

\*Rear Mount Low Kit is required for head-room between 250mm to 150mm

\*Minimum sideroom required is 150mm.

\*If an I-beam has been used in the head, it must be packed out with either brick, timber or plates to be welded (see diagram left) & flush on the plaster. This also applies to the side room (at least 150mm wide).